


# Solenoid Valve Timer 700 Series






## **Applications**

- Sampling gas or Liquids
- Air dryers
- Effluent sampling
- Sprinkler systems
- Auto drain valve: automatic discharge of condensate
- Pneumatic vibration systems (e.g. Powder silos)
- Automatic lubrication systems
- Dosing systems

# **Technical Specification**

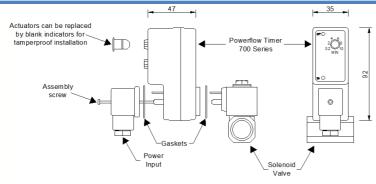

Every effort has been taken to ensure the accuracy of this specification. However in order to maintain our technological lead we are continuously improving our products which could, without notice result in amendments or omissions to this specification. We cannot accept responsibility for damage, injury, loss or expenses resulting therein.

Specification								
Timing Scale	ing Scale T Time		Model Specific					
Supply Voltage		24-240V AC/DC 50/60Hz or 12-24V DC (Standard)		!-24V DC (Standard)	Other supply voltages available on request			
Current Consumption		4mA Max.		Timing Temp. Coefficient		+ or – 0.005% °C		
Operating Temp.		-10 to +60°C		Scale Accuracy		+ or -10%		
<b>Environmental Protection</b>		IP65, NEMA IV		Reset/ Test		Manual Touch Switch		
Switch Capacity		1 Amp.		Printed Circuit Board		UL 94V0		
Inrush Current		10 Amps for 10mSec		Repeat Accuracy		+ or – 1%		
Switching Holding Voltage		400V		Indicators		LED's to indicate phases		
Duty Cycles		100%		Design Standard		VDE 0110C		
Input		DIN 46350-A / ISO 4400		Output		DIN 46350-A / ISO 4400		
Supplied		Flat Gasket & screw		Optional Extras		Screws / Connectors / Power Cords		















# Solenoid Valve Timer 700 Series

Non – Tamperproof					
Delay Timer <u>Earth at 6</u>					
Part Number	T Time				
700-03-900	0.5 – 10Sec.				
700-03-901	2 – 30Sec.				
700-03-902	5 – 120Sec.				
Delay Timer <u>Earth at 0</u>					
Part Number	T Time				
700-03-903	0.5 – 10Sec.				
700-03-904	2 – 30Sec.				
700-03-905	5 – 120Sec.				
Delay Timer <u>Earth at 3</u>					
Part Number	T Time				
700-03-906	0.5 – 10Sec.				
700-03-907	2 – 30Sec.				
700-03-908	5 – 120Sec.				
Delay Timer <u>Earth at 9</u>					
Part Number	T Time				
700-03-909	0.5 – 10Sec.				
700-03-910	2 – 30Sec.				
700-03-911	5 – 120Sec.				

Tamperproof					
Delay Timer <u>Earth at 6</u>					
Part Number	T Time				
700-03-912	0.5 – 10Sec.				
700-03-913	2 – 30Sec.				
700-03-914	5 – 120Sec.				
Delay Timer <u>Earth at 0</u>					
Part Number	T Time				
700-03-915	0.5 – 10Sec.				
700-03-916	2 – 30Sec.				
700-03-917	5 – 120Sec.				
Delay Timer <u>Earth at 3</u>					
Part Number	T Time				
700-03-918	0.5 – 10Sec.				
700-03-919	2 – 30Sec.				
700-03-920	5 – 120Sec.				
Delay Timer <u>Earth at 9</u>					
Part Number	T Time				
700-03-921	0.5 – 10Sec.				
700-03-922	2 – 30Sec.				
700-03-923	5 – 120Sec.				

Other timings available on request:
msec, sec, mins, hrs, days, weeks, months
Fixed timings available
Memory backup option
Standard Colour: Black
Other colours available

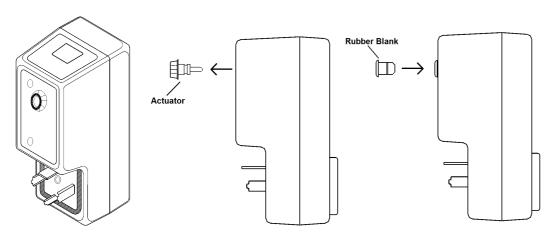



### **Tamperproof Assembly**

Set the desired cycle times Remove the actuator Insert the rubber blank

Be sure to keep the actuators in a safe place so cycle times can be adjusted in the future