

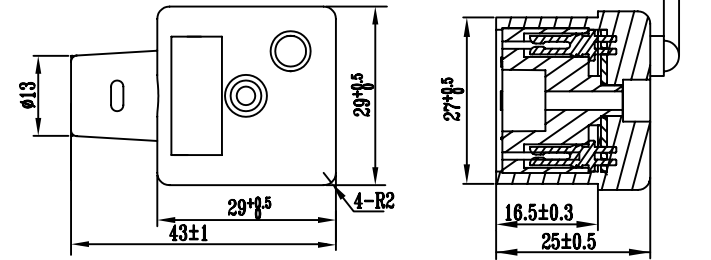
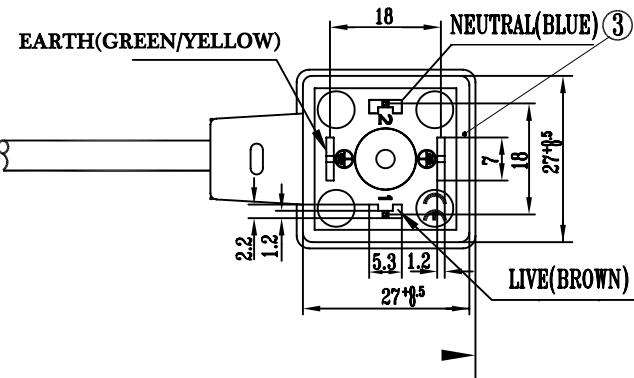
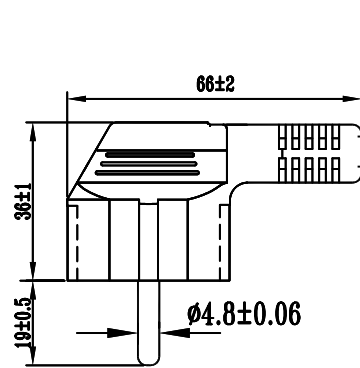
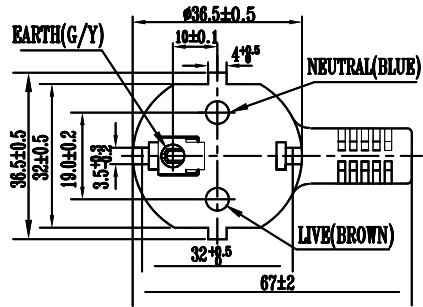


*CHANGE POLARITY OF PT004

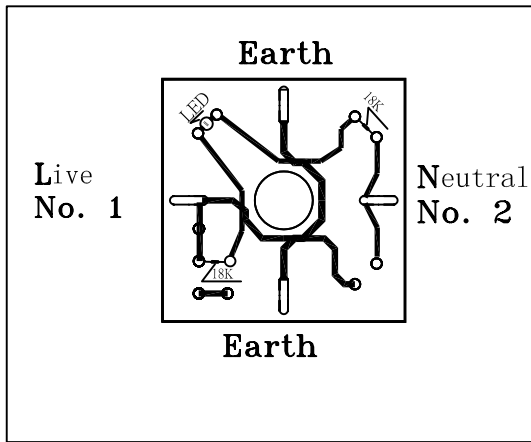

ALL PARTS COMPLY WITH RoHS

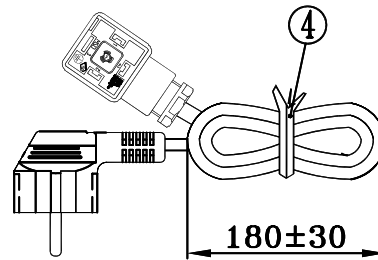

DIMENSIONS AND CHARACTERISTICS OF CORD
 RATED VOLTAGE AND TEMPERATURE : 300V/105°C
 NUMBER OF CORES : 3
CONDUCTOR
 CONSTRUCTION : 41/0.16
 AVERAGE THICKNESS OF INSULATION : 0.38mm
 AVERAGE THICKNESS OF JACKET : 0.76mm
 PVC INSULATION OVERALL DIAMETER : $\phi 2.05 \pm 0.10$ mm
 PVC JACKET OVERALL DIAMETER : $\phi 6.10 \pm 0.15$ mm

MARKING:
 THE MARKING OF THE CORD:
 SVT 3X18AWG 105°C VW-1 Δ
 THE MARKING OF THE PLUG:
 GMG03 Δ 125V
 THE MARKING OF THE PLUGTOP:
 $\text{C} \text{E} \text{1} \text{2}$ \oplus \ominus

Constructed				Material		Volume	Pieces
Checked				Date Created			
Approved					Sheet	Part Number	
Sheet	Name	Signature	Date				
Scale	Name			European Cable with Din A (Illuminated) Output			
1 : 1							