

DIMENSIONS AND CHARACTERISTICS OF CORD

RATED VOLTAGE	: 300/500V
NUMBER OF CORES	: 3
CONDUCTOR CONSTRUCTION	: 26/0.185
AVERAGE THICKNESS OF INSULATION	: 0.60mm
AVERAGE THICKNESS OF JACKET	: 0.80mm
PVC INSULATION OVERALL DIAMETER	: $\phi 2.35 \pm 0.10$ mm
PVC JACKET OVERALL DIAMETER	: $\phi 6.80 \pm 0.20$ mm

THE CORD APPROVED BY VDE, FIMKO AND SAA.
THE PLUG APPROVED BY VDE, FIMKO AND IMQ.

MARKING:

THE MARKING OF THE CORD:

<VDE> (F) NSW14842



H05VV-F 3G 0.75mm²

THE MARKING OF THE PLUG:

GMF02 16A 250V~

THE MARKING OF THE PLUG TOP :

MSD3 10A 250V~

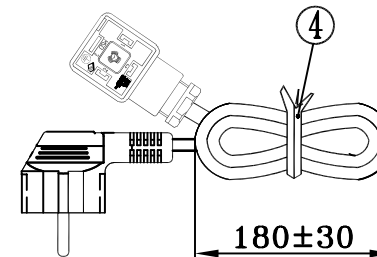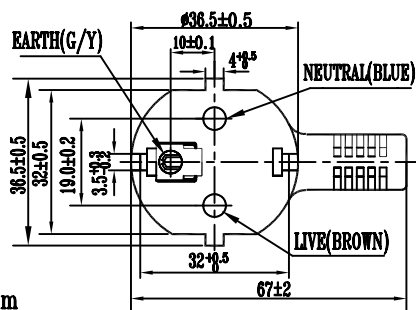

ALL PARTS COMPLY WITH RoHS

Constructed				Material		
Checked						
Approved				Date Created	Volume	Pieces
	Name	Signature	Date			Sheet
Sheet		Units	[mm]			
Scale	Name				Part Number	
1 : 1	European Cable with Din A Output					