
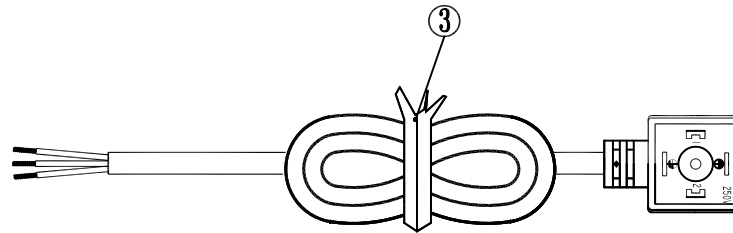
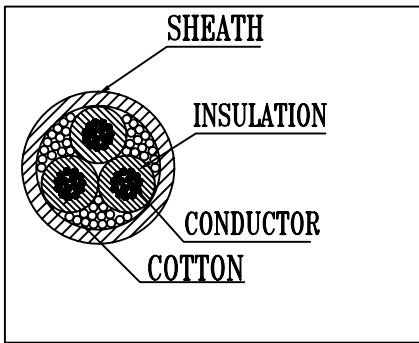


*CHANGE MARKING OF CABLE FROM VW-1 TO FT2

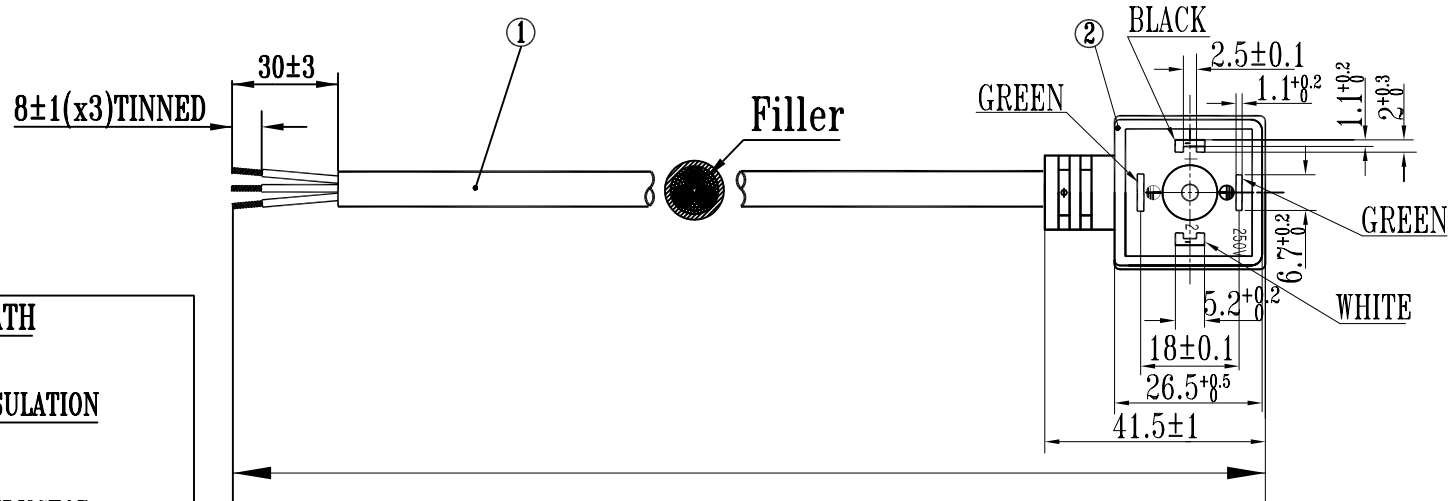

DIMENSIONS AND CHARACTERISTICS OF CORD

RATED VOLTAGE AND TEMPERATURE : 300V/60°C
 NUMBER OF CORES : 3

CONDUCTOR CONSTRUCTION : 41/0.16
 AVERAGE THICKNESS OF INSULATION : 0.38mm
 AVERAGE THICKNESS OF JACKET : 0.76mm

PVC INSULATION OVERALL DIAMETER : $\phi 2.05 \pm 0.10$ mm
 PVC JACKET OVERALL DIAMETER : $\phi 6.20 \pm 0.10$ mm

THE CORD APPROVED BY UL & C-UL.
 THE CONNECTOR APPROVED BY UL.

MARKING :

THE MARKING OF THE CORD :

(UL) E174414 C(UL) SVT 3X0.824mm²(18AWG) 60°C 300V FT2

THE MARKING OF THE PLUG TOP :

PF 1 2 250V

ALL PARTS COMPLY WITH RoHS

Constructed				Material		
Checked						
Approved				Date Created	Volume	Pieces
	Name	Signature	Date			Sheet
Sheet		Units	[mm]		Part Number	
Scale	Name					
1 : 1	North American Cable with Din A Output and Stripped & Tinned End					