


ALL PARTS COMPLY WITH RoHS

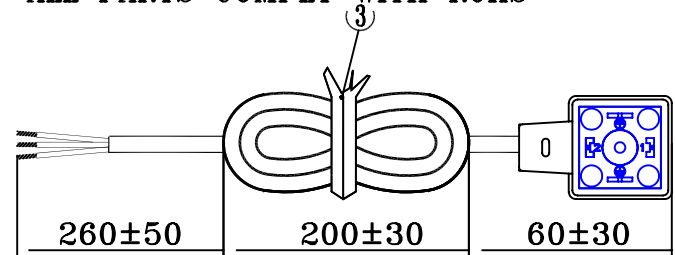

DIMENSIONS AND CHARACTERISTICS OF CORD
 RATED VOLTAGE AND TEMPERATURE : 300V/105°C
 NUMBER OF CORES : 3
CONDUCTOR
 CONSTRUCTION : 41/0.16
 AVERAGE THICKNESS OF INSULATION : 0.38mm
 AVERAGE THICKNESS OF JACKET : 0.76mm
 PVC INSULATION OVERALL DIAMETER : $\phi 2.05 \pm 0.10$ mm
 PVC JACKET OVERALL DIAMETER : $\phi 6.20 \pm 0.15$ mm

THE CORD APPROVED BY UL & C-UL

MARKING:

THE MARKING OF THE CORD:

(UL) E174414 C(UL) SVT 3X0.824mm²(18AWG) 105°C 300V FT2

THE MARKING OF THE PLUGTOP:

CE 1 2

Constructed				Material		
Checked						
Approved				Date Created	Volume	Pieces
	Name	Signature	Date			Sheet
Sheet		Units	[mm]		Part Number	
Scale	Name					
1 : 1	North American Cable with Din A Output and Stripped & Tinned End					