
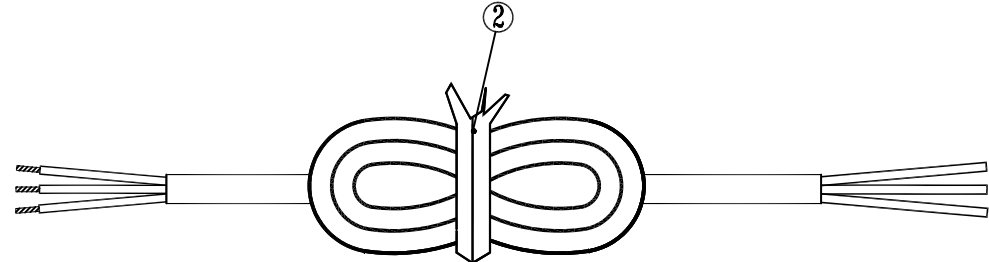
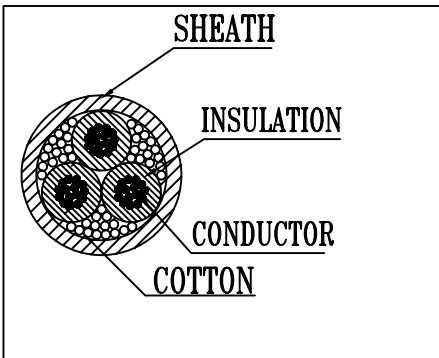


\*CHANGE MARKING OF CABLE FROM VW-1 TO FT2

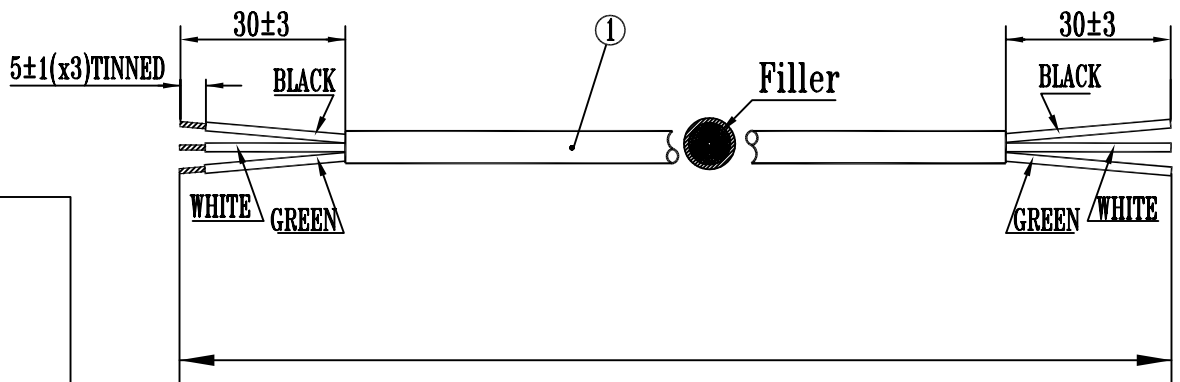

**DIMENSIONS AND CHARACTERISTICS OF CORD**  
 RATED VOLTAGE AND TEMPERATURE : 300V/60°C  
 NUMBER OF CORES : 3

**CONDUCTOR CONSTRUCTION** : 41/0.16  
**AVERAGE THICKNESS OF INSULATION** : 0.38mm  
**AVERAGE THICKNESS OF JACKET** : 0.76mm  
**PVC INSULATION OVERALL DIAMETER** :  $\phi 2.05 \pm 0.10$  mm  
**PVC JACKET OVERALL DIAMETER** :  $\phi 6.20 \pm 0.15$  mm

THE CORD APPROVED BY UL & C-UL.

MARKING :

THE MARKING OF THE CORD :

(UL) E174414 C(UL) SVT 3X0.824mm<sup>2</sup>(18AWG) 60°C 300V FT2

ALL PARTS COMPLY WITH RoHS

Constructed				Material		Volume	Pieces
Checked							
Approved				Date Created		Sheet	
Sheet	Name	Signature	Date				
Scale	Units	[mm]					
1 : 1	Name			Part Number			
	North American Cable, Stripped & Tinned at Both Ends						