





# Panel Mounted Timer

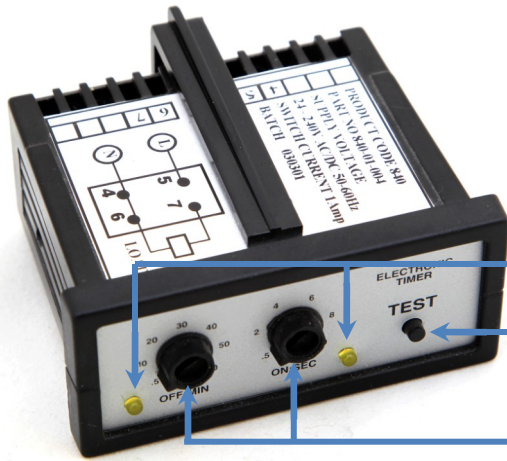





- ON/OFF LED Indicators
- Test Button
- ON/OFF Time Adjusters

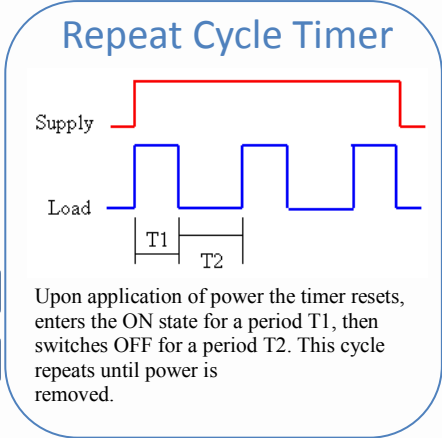

## Applications

- ◆ Sampling gas or Liquids
- ◆ Air dryers
- ◆ Effluent sampling
- ◆ Sprinkler systems
- ◆ Auto drain valve: automatic discharge of condensate
- ◆ Pneumatic vibration systems (e.g. Powder silos)
- ◆ Automatic lubrication systems
- ◆ Dosing systems

## Technical Specification



Specification				
Timing Scale	T1 Time	Model Specific	T2 Time	Model Specific
Supply Voltage	24-240V AC/DC 50/60Hz (Standard)		Other supply voltages available on request	
Current Consumption	4mA Max.	Timing Temp. Coefficient	+ or - 0.005% °C	
Operating Temp.	-10 to +60°C	Scale Accuracy	+ or -10%	
Switch Capacity	1 Amp.	Reset/ Test	Manual Touch Switch	
Inrush Current	10 Amps for 10mSec	Printed Circuit Board	UL 94V0	
Switching Holding Voltage	400V	Repeat Accuracy	+ or - 1%	
Duty Cycles	100%	Indicators	LED's to indicate phases	
Input	Screw Terminals	Design Standard	VDE 0110C	
		Output	Screw Terminals	



Every effort has been taken to ensure the accuracy of this specification. However in order to maintain our technological lead we are continuously improving our products which could, without notice result in amendments or omissions to this specification. We cannot accept responsibility for damage, injury, loss or expenses resulting therein.