
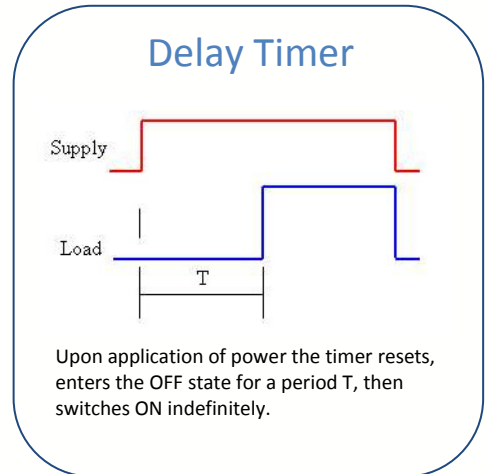



Solenoid Valve Timer 790 Series

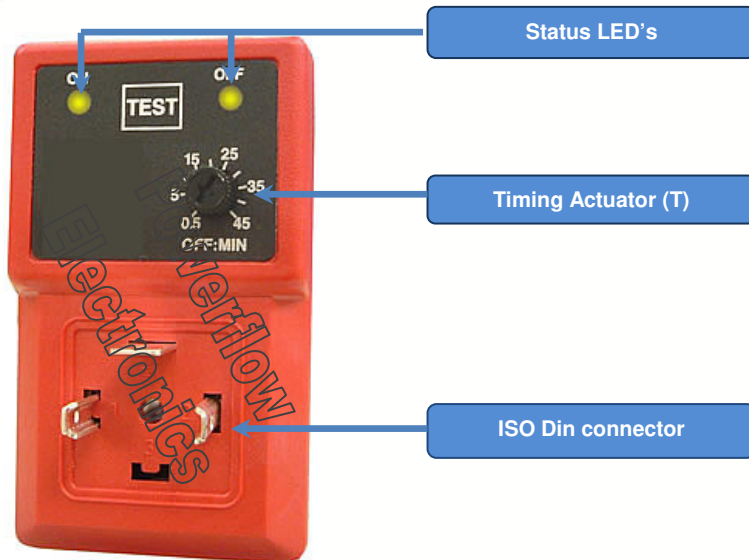

Applications

- ◆ Sampling gas or Liquids
- ◆ Air dryers
- ◆ Effluent sampling
- ◆ Sprinkler systems
- ◆ Auto drain valve: automatic discharge of condensate
- ◆ Pneumatic vibration systems (e.g. Powder silos)
- ◆ Automatic lubrication systems
- ◆ Dosing systems

Technical Specification

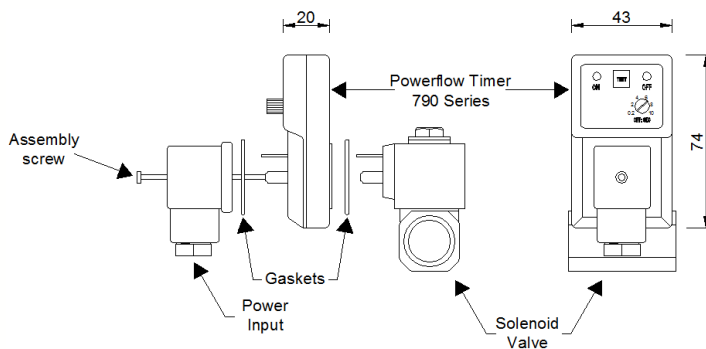


Every effort has been taken to ensure the accuracy of this specification. However in order to maintain our technological lead we are continuously improving our products which could, without notice result in amendments or omissions to this specification. We cannot accept responsibility for damage, injury, loss or expenses resulting therein.

Specification			
Timing Scale	T Time	Model Specific	
Supply Voltage	24-240V AC/DC 50/60Hz (Standard)		Other supply voltages available on request
Current Consumption	4mA Max.	Timing Temp. Coefficient	+ or - 0.005% °C
Operating Temp.	-10 to +60°C	Scale Accuracy	+ or -10%
Environmental Protection	IP65, NEMA IV	Reset/ Test	Manual Touch Switch
Switch Capacity	1 Amp.	Printed Circuit Board	UL 94V0
Inrush Current	10 Amps for 10mSec	Repeat Accuracy	+ or - 1%
Switching Holding Voltage	400V	Indicators	LED's to indicate phases
Duty Cycles	100%	Design Standard	VDE 0110C
Input	DIN 46350-A / ISO 4400	Output	DIN 46350-B / ISO 6952
Supplied	Flat Gasket & 50mm screw	Optional Extras	Screws / Connectors / Power Cords



International Organization for Standardization





Solenoid Valve Timer 790 Series

Delay Timer <u>Earth at 0</u>	
Part Number	T1 Time
Delay Timer <u>Earth at 6</u>	
Part Number	T1 Time
Other timings available on request: <i>msec, sec, mins, hrs, days, weeks, months</i> Fixed timings available Memory backup option Any colour	