
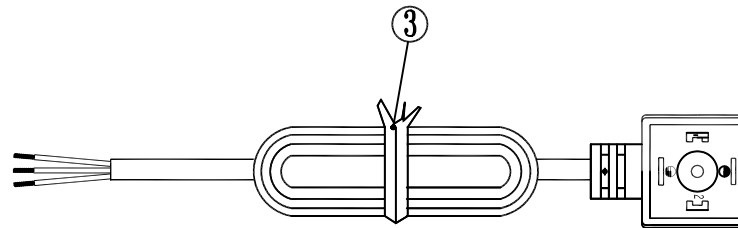


*CHANGE MARKING OF CABLE FROM "N14842" TO "NSW14842"

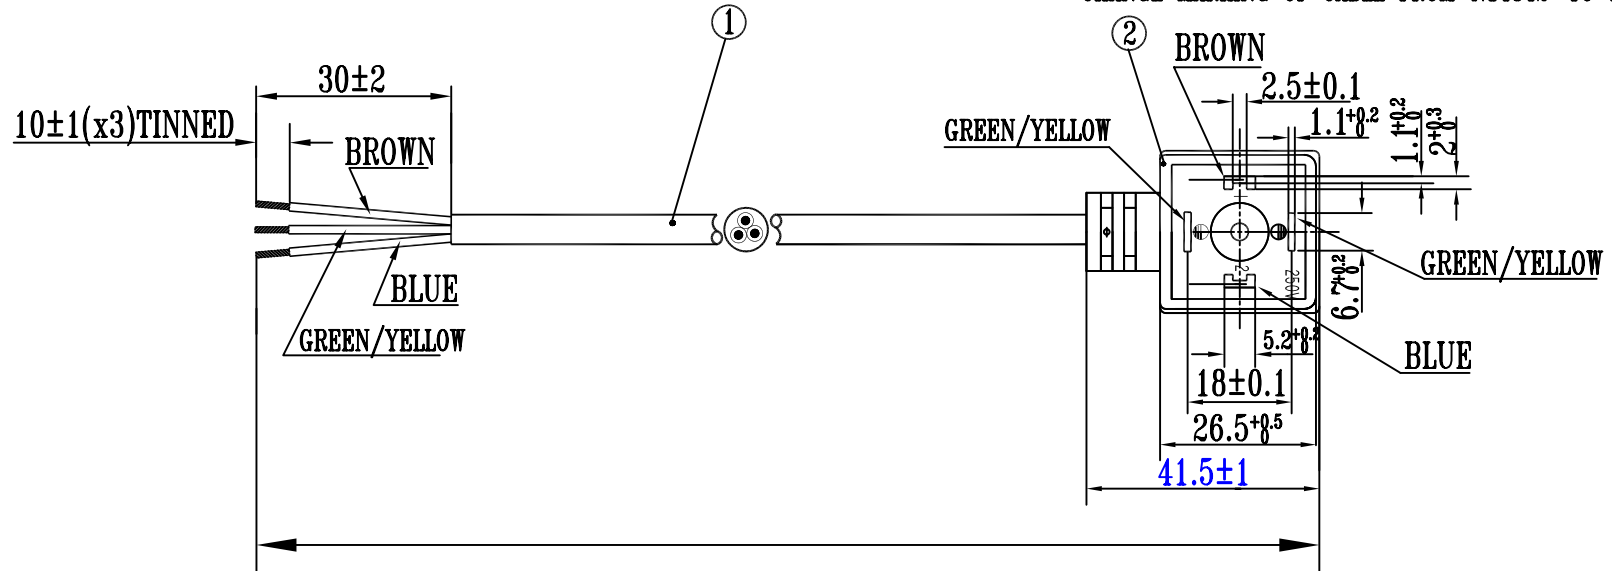

DIMENSIONS AND CHARACTERISTICS OF CORD

RATED VOLTAGE : 300/500V
 NUMBER OF CORES : 3

CONDUCTOR

CONSTRUCTION : 26/0.185
 AVERAGE THICKNESS OF INSULATION : 0.60mm
 AVERAGE THICKNESS OF JACKET : 0.80mm
 PVC INSULATION OVERALL DIAMETER : $\phi 2.35 \pm 0.10$ mm
 PVC JACKET OVERALL DIAMETER : $\phi 6.80 \pm 0.20$ mm

THE CORD APPROVED BY VDE, FIMKO AND SAA.


MARKING :

THE MARKING OF THE CORD:



<VDE>

F1 NSW14842  GOLD MARK H05VV-F 3G 0.75mm²

THE MARKING OF THE PLUG TOP :

PF 1 2 250V 

ALL PARTS COMPLY WITH RoHS

Constructed				Material		
Checked						
Approved				Date Created	Volume	Pieces
 Name	Signature	Date				Sheet
Sheet		Units	[mm]		Part Number	
Scale	Name					
1 : 1	European Cable with Din A Output and Stripped & Tinned End					