
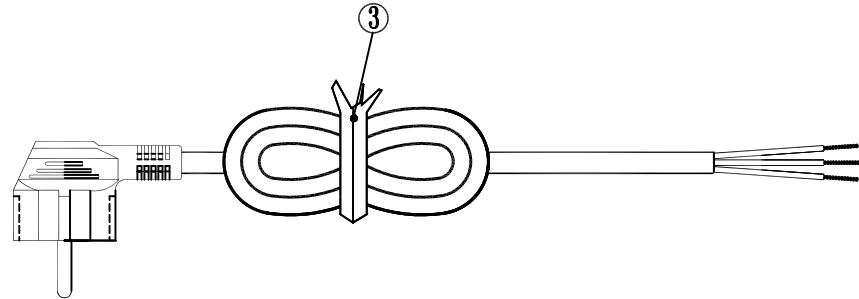
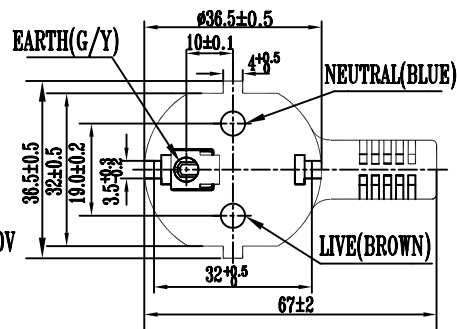


\*CHANGE MARKING OF CABLE FROM "N14842" TO "NSW14842"

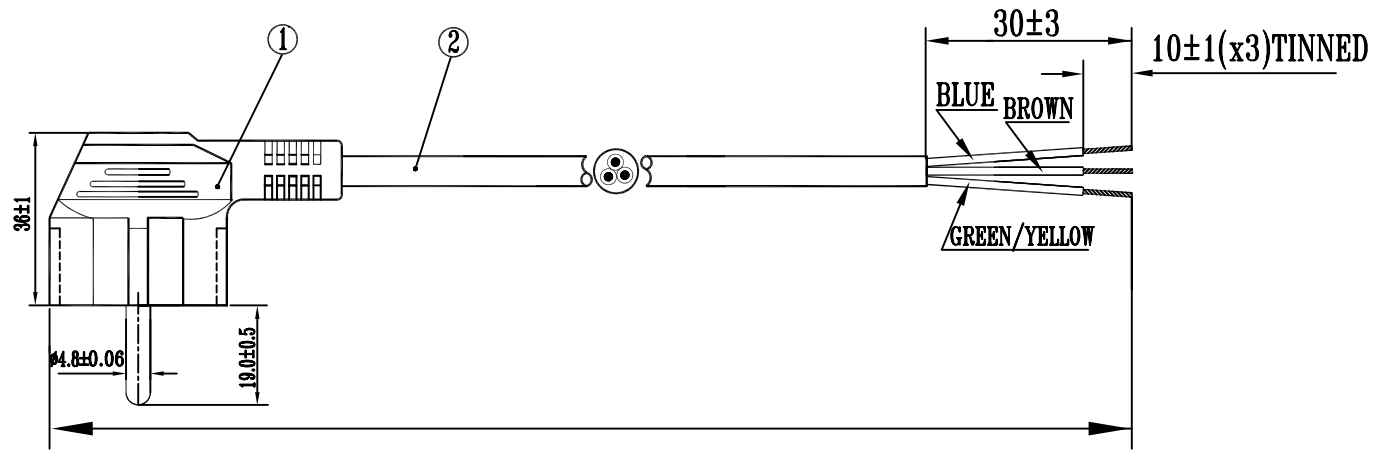

**DIMENSIONS AND CHARACTERISTICS OF CORD**

RATED VOLTAGE : 300/500V  
 NUMBER OF CORES : 3

CONDUCTOR CONSTRUCTION : 26/0.185  
 AVERAGE THICKNESS OF INSULATION : 0.60mm  
 AVERAGE THICKNESS OF JACKET : 0.80mm  
 PVC INSULATION OVERALL DIAMETER :  $\varnothing 2.35 \pm 0.10$ mm  
 PVC JACKET OVERALL DIAMETER :  $\varnothing 6.80 \pm 0.20$ mm

THE CORD APPROVED BY VDE, FIMKO AND SAA.  
 THE PLUG APPROVED BY VDE, FIMKO AND IMQ.

**MARKING:**

THE MARKING OF THE CORD:

<VDE> (F) **NSW14842** (A) GOLD MARK H05VV-F 3G 0.75mm<sup>2</sup>

THE MARKING OF THE PLUG:

GMF02 16A 250V~ (A) (B) (F) (G)

ALL PARTS COMPLY WITH RoHS

Constructed				Material		
Checked						
Approved				Date Created	Volume	Pieces
	Name	Signature	Date			Sheet
Sheet		Units	[mm]			
Scale	Name			Part Number		
1 : 1	European Cable with Stripped & Tinned Output					